


PULSAR

Low frequency modular pulse emitters

The Pulsar pulse emitters are at the core of the modular concept developed by Sappel over 10 years ago. They can be clipped onto all the meters of the Sappel modular range in a few seconds to turn them into communicating meters.

The new generation of Pulsar uses a Hall sensor and is available in two versions : standard 3-wire version which takes account of backflow and 4-wire version for determining the flow volume in both directions. Pulsar offers a number of alarms against magnetic tampering, unauthorised unclipping of module and cable cut.

Pulsar is powered by a lithium cell with a life of about 15 years and can be connected to remote reading system or Cursa consumption analysis system.

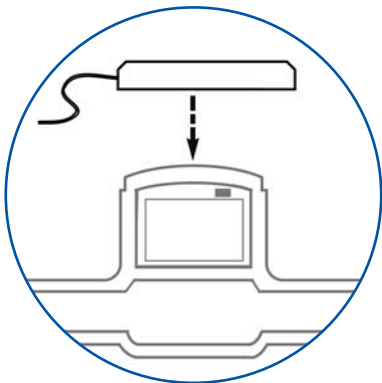

water range



industry range



energy range



modularity

Main technical characteristics

PULSE EMITTER

| | |
|---------|---------------|
| Type | Pulsar |
| Version | V 3.5 |


PHYSICS

| | |
|-----------|------------------------------------|
| Sensor | Hall principle |
| Principle | Revolving magnetic field detection |


OUTPUT SIGNAL

| | |
|------|--------------------------------|
| Type | NPN, open collector transistor |
|------|--------------------------------|

SPECIFICATIONS

| | | |
|-------------------------------|--|-----------------|
| Number of wires | 3 | 4 |
| Cable length | 1,5 m | 3 m |
| Power supply | Lithium cell | |
| Electric parameters | Max. output voltage : 30 V | |
| | Max. output current 0,5 µA (open status) Max. output current 100 mA (closed status) | |
| Max. frequency | 8 Hz | |
| GND | brown wire (-) | |
| Pulse | white wire (+) | |
| Tampering | green wire (+) | |
| Flow direction | Takes account of backflows, with up to 500 pulses per return | yellow wire (+) |
| Electromagnetic compatibility |  Complies with the European Directive relating to electromagnetic compatibility (cable length up to 3 metres) | |
| Pulse weight | 1 litre : DN 15 to 40 mm 10 litres : DN 50 to 125 mm 100 litres : DN 150 to 200 mm | |
| Operating temperature | -15°C to + 55°C | |
| Protection index | IP 685 | |

DIMENSIONS (mm)

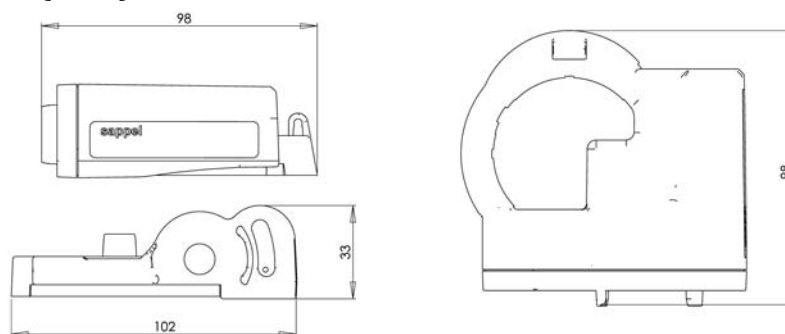

Distributed by :

If you have any question, please do not hesitate to contact us :



HEAD OFFICE B.P. 10160 - 67 rue du Rhône - 68304 Saint-Louis Cedex - France
Tel. +33 (0)3.89.69.54.00 - Fax +33 (0)3.89.69.72.20
Web: www.sappel.com - E-mail: info@sappel.com

EXPORT B.P. 10160 - 67 rue du Rhône - 68304 Saint-Louis Cedex - France
Tel. +33 (0)3.89.69.54.21 - Fax +33 (0)3.89.69.54.22
E-mail: export@sappel.com