

SJ Water Meter

FEATURES

- EEC Class B Approved
- Working pressure 16 Bar
- Dry dial register
- For cold (30°C) or warm (90°C) water
- Brass body
- Sensitivity index
- Counter perfectly sealed
- Suitable for horizontal or vertical installation
- Direct reading on 8 roller indicators, rotating counter through 360°
5 black digits for cubic meters, 3 red digits for litres




TECHNICAL DATA

Size		mm/inch	13-1/2	20-3/4
Nominal Flow Rate	Qn	(m ³ /h)	1.5	2.5
Maximum Flow Rate	Qmax	(m ³ /h)	3	5
Transitional Flow Rate	Qt	(l/h)	120	200
Minimum Flow Rate	Qmin	(l/h)	30	50
Starting Flow Rate		(l/h)	9	15
Dial Register from / to		(m ³)	0,05 / 99,999	0,5 / 99,999

DIMENSIONS

	mm	13	20
	Inches	1/2"	3/4"
A*	mm	110	130
B	mm	18	18
C	mm	70	70
D	mm	79	79
E	mm	146	146
F	mm	3/4"	1"
Couplings BSPM	mm		

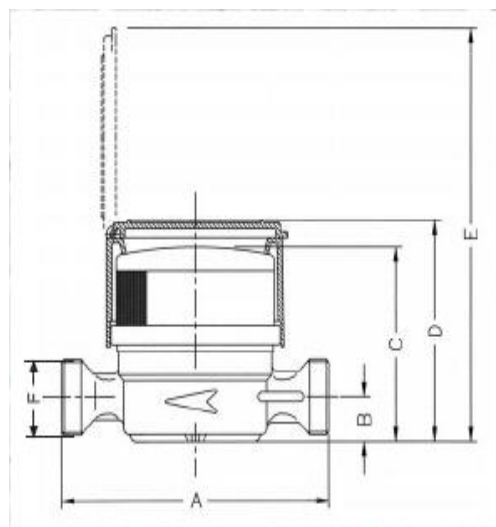

A* denotes special lengths and threads available on request.

Data provided is subject to technical changes in the course of further development

Last amended February 2010